



ROTANTE ROT02

ROTANTE NON BILANCIATA CON MOLLA CONICA UNIDIREZIONALE

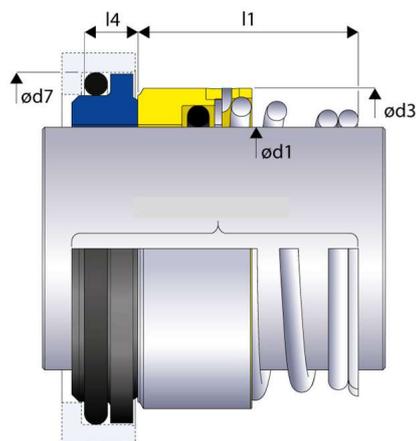

SPECIFICARE IL SENSO DI ROTAZIONE DELL'ALBERO

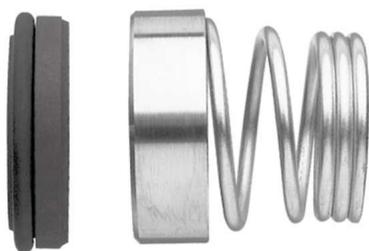

Disponibile anche con anelli
stazionari di differente profilo.

D1
10
11
12
13
14
15
16
18
19
20
22
23
24
25
28
30
32
33
35
38
38
40
42
43
44
45
48
50
55
60
65
70
75
80
85
90
95
100

ROT02				
D3	D7	L1	L4	
20.0	18.1	15.0	5.5	
21.0	20.6	18.0	5.5	
22.0	20.6	18.0	5.5	
23.0	23.1	22.0	6.0	
24.0	23.1	22.0	6.0	
25.0	26.9	22.0	7.0	
26.0	26.9	23.0	7.0	
31.0	30.9	24.0	8.0	
32.0	30.9	25.0	8.0	
34.0	30.9	25.0	8.0	
36.0	35.4	25.0	8.0	
37.0	35.4	27.0	8.0	
38.0	35.4	27.0	8.0	
39.0	38.2	27.0	8.5	
42.0	43.3	29.0	9.0	
44.0	43.3	30.0	9.0	
46.0	43.3	30.0	9.0	
47.0	53.5	39.0	11.5	
49.0	53.5	39.0	11.5	
54.0	60.5	39.0	11.5	
54.0	53.5	39.0	10.0	
56.0	60.5	39.0	11.5	
59.0	60.5	39.0	11.5	
59.0	60.5	39.0	11.5	
61.0	65.5	41.0	11.5	
61.0	65.5	41.0	11.5	
64.0	65.5	41.0	11.5	
66.0	72.5	45.0	11.5	
71.0	72.5	47.0	11.5	
79.0	79.3	49.0	11.5	
85.0	84.5	51.0	11.5	
90.0	89.5	51.0	11.5	
98.0	94.5	57.0	11.5	
103.0	99.5	59.0	11.5	
107.5	105.5	59.0	13.5	
111.0	111.5	62.0	13.5	
119.0	116.5	62.0	13.5	
124.0	119.5	75.0	13.5	

ROT02 DIN			
D3	D7	L1	L4
20.0	21.0	13.4	8.6
22.0	23.0	16.4	8.6
24.0	25.0	20.4	8.6
26.0	27.0	21.4	8.6
31.0	33.0	24.0	10.0
34.0	35.0	25.0	10.0
36.0	37.0	25.0	10.0
38.0	39.0	27.0	10.0
39.0	40.0	27.0	10.0
42.0	43.0	29.0	10.0
44.0	45.0	30.0	10.0
46.0	48.0	30.0	10.0
47.0	48.0	39.0	10.0
49.0	50.0	39.0	10.0
54.0	56.0	44.0	11.0
56.0	58.0	44.0	11.0
59.0	61.0	49.0	11.0
61.0	63.0	49.0	11.0
64.0	66.0	49.0	11.0
66.0	70.0	47.0	13.0
71.0	75.0	57.0	13.0
79.0	80.0	57.0	13.0
85.0	85.0	67.0	13.0
90.0	92.0	64.7	15.3
98.0	97.0	64.7	15.3
103.0	105.0	74.3	15.7
107.5	110.0	74.3	15.7
111.0	115.0	74.3	15.7
119.0	120.0	74.3	15.7
124.0	125.0	74.3	15.7

Intercambiabile con:

AES T03U
Burgmann BT-RN
Flowserve 42
Latty T900
MTU Europa 2
Roten 2
Sterling SR2
Vulcan 12

AES T03DU
Burgmann BT-RN.NU
Flowserve 42D
Latty T900 D
MTU Europa 1
Uniten 2
Vulcan 12 DIN

Materiali facce: SS304 - CB - SC - TC
Materiali elastomeri: NBR - FKM - EPDM

Pressione massima: 10 BAR

Velocità massima: 10 metri al secondo

Temperatura massima: 200 °C (dipende dagli o-rings)